VR2A-FS

Two Section Full Solid Door Refrigerator

VALIANCE by HOSHIZAKI

VR2A-FS
09/15/25
Item #13737

W x D x H
54.31” x 32.00” x 81.70”
(including 4” casters)



Item #: _____

Project: _____

Qty: _____

AIA#: _____

FEATURES

- Rear-Ducted Air-Flow ensures even cooling throughout entire cabinet
- Energy efficient interior LED light
- Environmentally friendly R290 hydrocarbon refrigerant
- Fits full size tray pans
- 3, 4, 5 Warranty
- Stay-open door(s) and self-closing doors
- Cabinet and doors are insulated with 2 5/16” of CFC free, foamed in place polyurethane
- Exterior - Stainless steel doors, DualGuard™ Coated steel sides
- Interior - Stainless steel floor, aluminum sides, rear and top
- SmartCheck™ time initiated and time or temperature terminated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2” increments; 3 per section
- Standard with 4” casters (three with brakes)
- 9 ft. cord and plug
- Cabinet Qty: 22

Dimensions / Capacity	Two Section VR2A-FS
Interior Storage Capacity (CF) (AHAM)	42.45 ft³
Overall Width x Depth	54.31” x 32.00”
Height (including 4” casters)	81.70”
Door Opening (W x H)	22.63” x 52.31”
Depth with Door Open at 90°	57.5”
Adjustable Shelves	6
Shelf Dimensions (W x D)	23.94” x 25.16”
Crated Shipping Weight	471 lbs
Crated Length x Depth x Height	58” x 33.5” x 83.88”

Electrical / Refrigeration	Two Section VR2A-FS
Voltage	115/60/1
HACR Breaker	15.0 Amps
Electrical Connection (NEMA)	5-15P
Voltage Range	103-127
Ambient Temp. Range	45° to 100°F
Control Setpoint Range	36° to 40°F
Amperage	3.5
Energy Consumption (kWh/day) @ASHRAE	1.48
Appox. Nominal Compres. BTU/HR (HP)	2322(1/2HP)
Refrigerant / Charge Amount (oz.)	R290 / (4.1oz)

Options

- ☐ Full Tray Pan Rack, 16 Pan Capacity (HS-5786)
- ☐ Half Tray Pan Rack, 8 Pan Capacity (HS-5787)
- ☐ Left 2-Section UR Shelf, 1 pack (HS-5790)
- ☐ Left 2-Section UR Shelf, 3 Pack (HS-5791)
- ☐ Right 2-Section UR Shelf, 1 pack (HS-5792)
- ☐ Right 2-Section UR Shelf, 3 pack (HS-5793)

Warranty

3 Year - labor on entire machine
4 Year - parts on entire machine
5 Year - parts on Compressor

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

If GFCI is required, a GFCI breaker MUST be used in lieu of GFCI receptacle

We reserve the right to change specifications without notice.

VR2A-FS

VALIANCE by HOSHIZAKI

VR2A-FS
09/15/25
Item #13737

FRONT VIEW

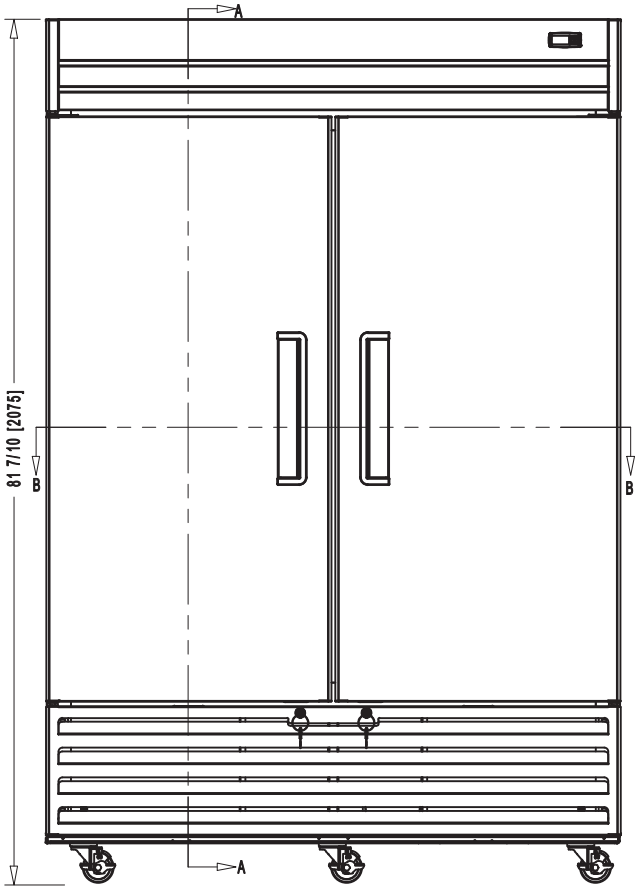

SIDE VIEW

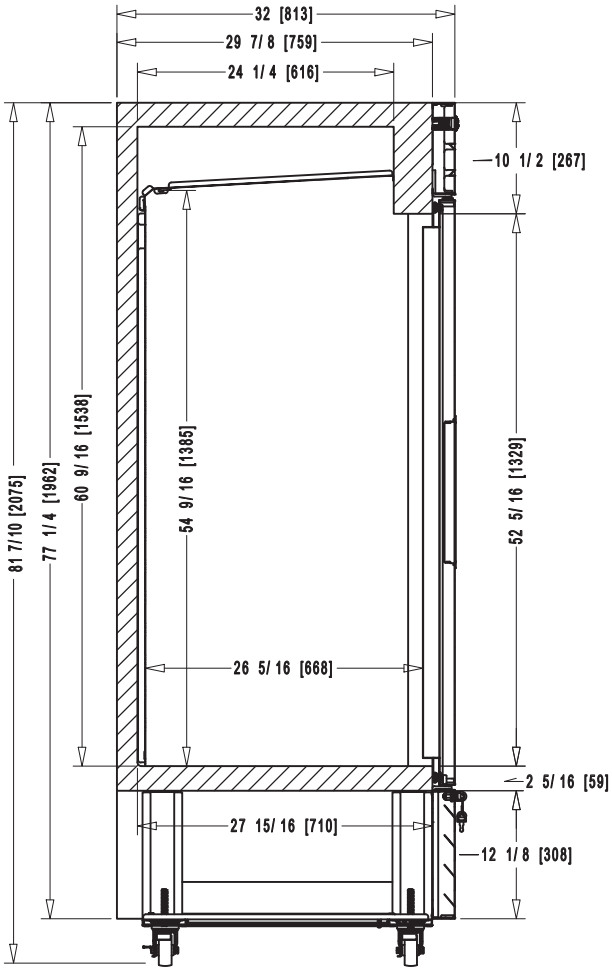

PLAN VIEW

